


xcanon**5 YEARS
WARRANTY****EN**

Series of recessed light fitting for interior, round or square shapes, with adjustable projectors, for mounting with rim or trimless, equipped with COB LED.
Frame and projectors of die-cast aluminum, electrostatically painted with sandblasted finishing.

The fixing rings of the projectors in polycarbonate.
Optical system with FRESNEL lens of PMMA, 36° dispersion angle.
Optionally can be ordered separately lenses with dispersion angles of 15° or 24°.
Decorative polycarbonate rings painted in mat black.
Constant current LED drivers have to be ordered separately.

Range of applications

Used for general or accent lighting in commercial areas, museums and other exhibition spaces as a decorative spots.

RO

Serie de corpuri de iluminat încastrate pentru montaj în interior, forme rotundă sau pătrată, cu proiectoare orientabile, pentru montaj cu sau fără ramă vizibilă, echipate cu LED COB.
Rama și corpurile proiectoarelor din aluminiu turnat, vopsite în câmp electrostatic cu finisaj sablat.

Inelele de fixare a proiectoarelor din policarbonat.
Sistem optic cu lentilă FRESNEL din PMMA, dispersie unghiulară de 36°.
Opțional pot fi comandate separat lentile cu dispersii de 15° sau 24°.
Inele decorative din policarbonat, vopsite negru mat.
Alimentatoarele în curent constant se comandă separat.

Aplicații

Pot fi utilizate pentru iluminatul general sau de accent în spații comerciale, muzee și alte spații de expunere sau ca spoturi decorative.

IT

Apparecchi da incasso per interni, forma rotonda o quadrata, con proiettori orientabili, cornice per montaggio o senza cornice, equipaggiati con LED COB.
Cornice e corpi dei proiettori in alluminio pressofuso verniciati a polveri con finitura sabbiata.
Anelli di fissaggio dei proiettori in policarbonato.
Sistema ottico con lente FRESNEL in PMMA, angolo di dispersione di 36°.
Su richiesta possono essere ordinati separatamente lenti da 15° o 24°.
Anelli decorativi in policarbonato verniciati nero opaco.
Alimentatori in corrente costante da ordinare separatamente.

Campi di applicazione

Possono essere utilizzati per l'illuminazione generale o d'accento in spazi commerciali, musei e altri spazi espositivi o come faretti decorativi.




RECESSED MODELS

CN01

FINISHING AVAILABLE


SWH SBK



OPTICAL SYSTEMS

Code	Optics
CN7LN15	15°
CN7LN24	24°

PMMA lens.
Lentilă din PMMA.
Lente în PMMA.




Code	Finishing	LED type	Power	Output current/voltage driver	Driver	LED flux	System flux	CCT	CRI	Optics	Weight	
CN01WW SWH	SWH	COB CITIZEN	1x7W	350 mA / 19V DC max.	Excluded	830 lm	560 lm	3000K	92	36°	Ø83 mm	0,30 kg
CN01WW SBK	SBK	COB CITIZEN	1x7W	350 mA / 19V DC max.	Excluded	830 lm	560 lm	3000K	92	36°	Ø83 mm	0,30 kg

CN02

FINISHING AVAILABLE


SWH SBK



OPTICAL SYSTEMS

Code	Optics
CN7LN15	15°
CN7LN24	24°

PMMA lens.
Lentilă din PMMA.
Lente în PMMA.




Code	Finishing	LED type	Power	Output current/voltage driver	Driver	LED flux	System flux	CCT	CRI	Optics	Weight	
CN02WW SWH	SWH	COB CITIZEN	1x7W	350 mA / 19V DC max.	Excluded	830 lm	560 lm	3000K	92	36°	78x78 mm	0,35 kg
CN02WW SBK	SBK	COB CITIZEN	1x7W	350 mA / 19V DC max.	Excluded	830 lm	560 lm	3000K	92	36°	78x78 mm	0,35 kg

CN09

FINISHING AVAILABLE


SWH SBK



OPTICAL SYSTEMS

Code	Optics
CN7LN15	15°
CN7LN24	24°

PMMA lens.
Lentilă din PMMA.
Lente în PMMA.



Code	Finishing	LED type	Power	Output current/voltage driver	Driver	LED flux	System flux	CCT	CRI	Optics	Weight	
CN09WW SWH	SWH	COB CITIZEN	2x7W	350 mA / 19V DC max.	Excluded	1620 lm	1093 lm	3000K	92	36°	78x150 mm	0,65 kg
CN09WW SBK	SBK	COB CITIZEN	2x7W	350 mA / 19V DC max.	Excluded	1620 lm	1093 lm	3000K	92	36°	78x150 mm	0,65 kg

RECOMMENDED CC DRIVERS FOR 7W POWER




RECOMMENDED CC DRIVERS FOR 13W POWER



CN05

FINISHING AVAILABLE


SWH SBK



OPTICAL SYSTEMS

Code	Optics
CN13LN15	15°
CN13LN24	24°

PMMA lens.
Lentilă din PMMA.
Lente în PMMA.




Code	Finishing	LED type	Power	Output current/voltage driver	Driver	LED flux	System flux	CCT	CRI	Optics	Weight	
CN05WW SWH	SWH	COB CITIZEN	1x13W	350 mA / 37V DC max.	Excluded	1675 lm	1149 lm	3000K	92	36°	Ø83 mm	0,45 kg
CN05WW SBK	SBK	COB CITIZEN	1x13W	350 mA / 37V DC max.	Excluded	1675 lm	1149 lm	3000K	92	36°	Ø83 mm	0,45 kg

CN06

FINISHING AVAILABLE


SWH SBK



OPTICAL SYSTEMS

Code	Optics
CN13LN15	15°
CN13LN24	24°

PMMA lens.
Lentilă din PMMA.
Lente în PMMA.




Code	Finishing	LED type	Power	Output current/voltage driver	Driver	LED flux	System flux	CCT	CRI	Optics	Weight	
CN06WW SWH	SWH	COB CITIZEN	1x13W	350 mA / 37V DC max.	Excluded	1675 lm	1149 lm	3000K	92	36°	78x78 mm	0,50 kg
CN06WW SBK	SBK	COB CITIZEN	1x13W	350 mA / 37V DC max.	Excluded	1675 lm	1149 lm	3000K	92	36°	78x78 mm	0,50 kg

CN10

FINISHING AVAILABLE


SWH SBK




OPTICAL SYSTEMS

Code	Optics
CN13LN15	15°
CN13LN24	24°

PMMA lens.
Lentilă din PMMA.
Lente în PMMA.



Code	Finishing	LED type	Power	Output current/voltage driver	Driver	LED flux	System flux	CCT	CRI	Optics	Weight	
CN10WW SWH	SWH	COB CITIZEN	2x13W	350 mA / 37V DC max.	Excluded	2890 lm	2144 lm	3000K	92	36°	78x150 mm	0,85 kg
CN10WW SBK	SBK	COB CITIZEN	2x13W	350 mA / 37V DC max.	Excluded	2890 lm	2144 lm	3000K	92	36°	78x150 mm	0,85 kg





TRIMLESS RECESSED MODELS

CN03

FINISHING AVAILABLE

SWH SBK



OPTICAL SYSTEMS

Code	Optics
CN7LN15	15°
CN7LN24	24°




PMMA lens.
Lentilă din PMMA.
Lente in PMMA.

Code	Finishing	LED type	Power	Output current/voltage driver	Driver	LED flux	System flux	CCT	CRI	Optics	Weight
CN03WW SWH	SWH	COB CITIZEN	1x7W	350 mA / 19V DC max.	Excluded	830 lm	560 lm	3000K	92	36°	0,35 kg
CN03WW SBK	SBK	COB CITIZEN	1x7W	350 mA / 19V DC max.	Excluded	830 lm	560 lm	3000K	92	36°	0,35 kg

CN04

FINISHING AVAILABLE

SWH SBK

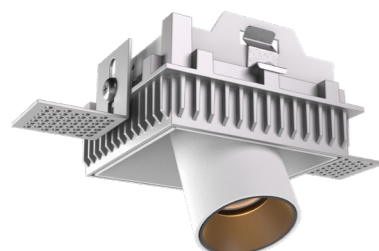

OPTICAL SYSTEMS

Code	Optics
CN7LN15	15°
CN7LN24	24°



PMMA lens.
Lentilă din PMMA.
Lente in PMMA.

Code	Finishing	LED type	Power	Output current/voltage driver	Driver	LED flux	System flux	CCT	CRI	Optics	Weight
CN04WW SWH	SWH	COB CITIZEN	1x7W	350 mA / 19V DC max.	Excluded	830 lm	560 lm	3000K	92	36°	0,40 kg
CN04WW SBK	SBK	COB CITIZEN	1x7W	350 mA / 19V DC max.	Excluded	830 lm	560 lm	3000K	92	36°	0,40 kg

CN11

FINISHING AVAILABLE

SWH SBK



OPTICAL SYSTEMS

Code	Optics
CN7LN15	15°
CN7LN24	24°

PMMA lens.
Lentilă din PMMA.
Lente in PMMA.

Code	Finishing	LED type	Power	Output current/voltage driver	Driver	LED flux	System flux	CCT	CRI	Optics	Weight
CN11WW SWH	SWH	COB CITIZEN	2x7W	350 mA / 19V DC max.	Excluded	1620 lm	1093 lm	3000K	92	36°	0,75 kg
CN11WW SBK	SBK	COB CITIZEN	2x7W	350 mA / 19V DC max.	Excluded	1620 lm	1093 lm	3000K	92	36°	0,75 kg

RECOMMENDED CC DRIVERS FOR 7W POWER






RECOMMENDED CC DRIVERS FOR 13W POWER



CN07

FINISHING AVAILABLE

SWH SBK



OPTICAL SYSTEMS

Code	Optics
CN13LN15	15°
CN13LN24	24°



PMMA lens.
Lentilă din PMMA.
Lente in PMMA.

Code	Finishing	LED type	Power	Output current/voltage driver	Driver	LED flux	System flux	CCT	CRI	Optics	Weight
CN07WW SWH	SWH	COB CITIZEN	1x13W	350 mA / 37V DC max.	Excluded	1675 lm	1149 lm	3000K	92	36°	0,50 kg
CN07WW SBK	SBK	COB CITIZEN	1x13W	350 mA / 37V DC max.	Excluded	1675 lm	1149 lm	3000K	92	36°	0,50 kg

CN08

FINISHING AVAILABLE

SWH SBK



OPTICAL SYSTEMS

Code	Optics
CN13LN15	15°
CN13LN24	24°



PMMA lens.
Lentilă din PMMA.
Lente in PMMA.

Code	Finishing	LED type	Power	Output current/voltage driver	Driver	LED flux	System flux	CCT	CRI	Optics	Weight
CN08WW SWH	SWH	COB CITIZEN	1x13W	350 mA / 37V DC max.	Excluded	1675 lm	1149 lm	3000K	92	36°	0,55 kg
CN08WW SBK	SBK	COB CITIZEN	1x13W	350 mA / 37V DC max.	Excluded	1675 lm	1149 lm	3000K	92	36°	0,55 kg

CN12

FINISHING AVAILABLE

SWH SBK



OPTICAL SYSTEMS

Code	Optics
CN13LN15	15°
CN13LN24	24°

PMMA lens.
Lentilă din PMMA.
Lente in PMMA.

Code	Finishing	LED type	Power	Output current/voltage driver	Driver	LED flux	System flux	CCT	CRI	Optics	Weight
CN12WW SWH	SWH	COB CITIZEN	2x13W	350 mA / 37V DC max.	Excluded	2890 lm	2144 lm	3000K	92	36°	0,95 kg
CN12WW SBK	SBK	COB CITIZEN	2x13W	350 mA / 37V DC max.	Excluded	2890 lm	2144 lm	3000K	92	36°	0,95 kg