

# xplanet surface

3 YEARS  
WARRANTY



## EN

Surface mounted light fittings with flat shape, equipped with SMD LEDs, provided with very wide dispersion angle lenses, to ensure the uniformity of illumination at the level of the diffuser.

The frame of the luminaire from aluminum profile, the housing of steel board, electrostatically painted.

Fixing system of steel board, electrostatically painted.

Diffuser of opal polystyrene.

Constant current LED driver delivered with the light fitting.

### Range of applications

General lighting in offices, schools, hospitals and commercial spaces.

## RO

Corpuri de iluminat cu formă plată pentru montaj aparent, echipate cu LED-uri SMD prevăzute cu lentile cu unghi de dispersie foarte larg, pentru asigurarea uniformității iluminatului la nivelul dispersorului.

Rama corpului din profil de aluminiu, iar carcasa din tablă de oțel, vopsite în câmp electrostatic.

Sistem de fixare din tablă de oțel, vopsit în câmp electrostatic.

Dispersor din polistiren opal.

Alimentator în curent constant livrat împreună cu corpul de iluminat.

### Aplicații

Iluminatul general în birouri, școli, spitale și spații comerciale.

## IT

Apparecchi di illuminazione con forma piatta per montaggio a soffitto, equipaggiati con LED SMD, dotati di lenti con un angolo di dispersione molto ampio per garantire uniformità di illuminazione.

Cornici perimetrali in profilo di alluminio e corpo in lamiera d'acciaio, verniciati a polveri.


Sistema di fissaggio in lamiera d'acciaio, verniciato a polveri.

Diffusore in polistirene opale.

Alimentatore in corrente costante fornito con l'apparecchio.

### Campi di applicazione

Illuminazione generale di uffici, scuole, ospedali e negozi.





see also xplanet recessed  
at page 252

**PTS3060**

FINISHING AVAILABLE



**MWH**



**PTS30120**

FINISHING AVAILABLE



**MWH**

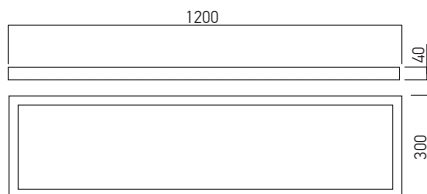

**PTS6060**

FINISHING AVAILABLE

**MWH**



| Code             | Finishing | Type of LED | Power | Input voltage | Output current/voltage driver | Driver   | LED flux | System flux | CCT   | CRI | Optics | Weight  |
|------------------|-----------|-------------|-------|---------------|-------------------------------|----------|----------|-------------|-------|-----|--------|---------|
| ● PTS3060WW MWH  | MWH       | SMD 2835    | 24W   | 220-240V AC   | 600 mA / 32-40V DC            | Included | 2880 lm  | 2023 lm     | 3000K | 80  | 120°   | 0,91 Kg |
| PTS3060NW MWH    | MWH       | SMD 2835    | 24W   | 220-240V AC   | 600 mA / 32-40V DC            | Included | 3000 lm  | 2158 lm     | 4000K | 80  | 120°   | 0,91 Kg |
| ● PTS30120WW MWH | MWH       | SMD 2835    | 40W   | 220-240V AC   | 1000 mA / 30-42V DC           | Included | 4800 lm  | 3349 lm     | 3000K | 80  | 120°   | 1,93 Kg |
| PTS30120NW MWH   | MWH       | SMD 2835    | 40W   | 220-240V AC   | 1000 mA / 30-42V DC           | Included | 5000 lm  | 3578 lm     | 4000K | 80  | 120°   | 1,93 Kg |
| ● PTS6060WW MWH  | MWH       | SMD 2835    | 40W   | 220-240V AC   | 1000 mA / 30-42V DC           | Included | 4200 lm  | 3327 lm     | 3000K | 80  | 120°   | 2,10 Kg |
| PTS6060NW MWH    | MWH       | SMD 2835    | 40W   | 220-240V AC   | 1000 mA / 30-42V DC           | Included | 4400 lm  | 3553 lm     | 4000K | 80  | 120°   | 2,10 Kg |

● ORDERED UPON REQUEST / DISPONIBIL. DOAR LA COMANDĂ / DISPONIBILE SOLO SU ORDINAZIONE