

**Luminaire**


 Code FO06NW30  
 Name XFLOW

**Measur.**

 Code FO06NW30  
 Name XFLOW

Luminaire Flux	1731.67 lm	Luminaire Power	24.00 W	Efficacy	72.15 lm/W	Efficiency	98.67%
Lamps Flux	1755.00 lm	Maximum value	4898.82 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	980 mm	Width	50 mm	Height	10 mm
Rectangular Luminous Area		Length	980 mm	Width	50 mm	Height	10 mm
Horizontal Luminous Area	0.049000 m2	Emitting area on Plane 180°		Emitting area on Plane 270°		Emitting area on Plane 90°	
Emitting area on Plane 0°	0.009800 m2						
Emitting area on Plane 90°	0.000500 m2			Glare area at 76°			
Coordinate system	CG	Symmetry Type		Measurement Flux		Double Symmetrical	
Date	10-05-2019	Maximum Gamma Angle				180	
Measurement Distance	0.00					1755.00 lm	
Operator		Source Voltage [V]		Source current [A]		Photocell	
Temperature	25.00 °C						
Humidity	60.00 %						
Notes							

Luminaire Lamps						
Line	Code	Name	Flux [lm]	Pow. [W]	Q.ty	
	FO06NW30	XFLOW	1755.00	24.00	1	
C.I.E.	95 99 100 100 99	D DIN 5040	A60			
F UTE	0.99 A	B NBN	BZ 1			



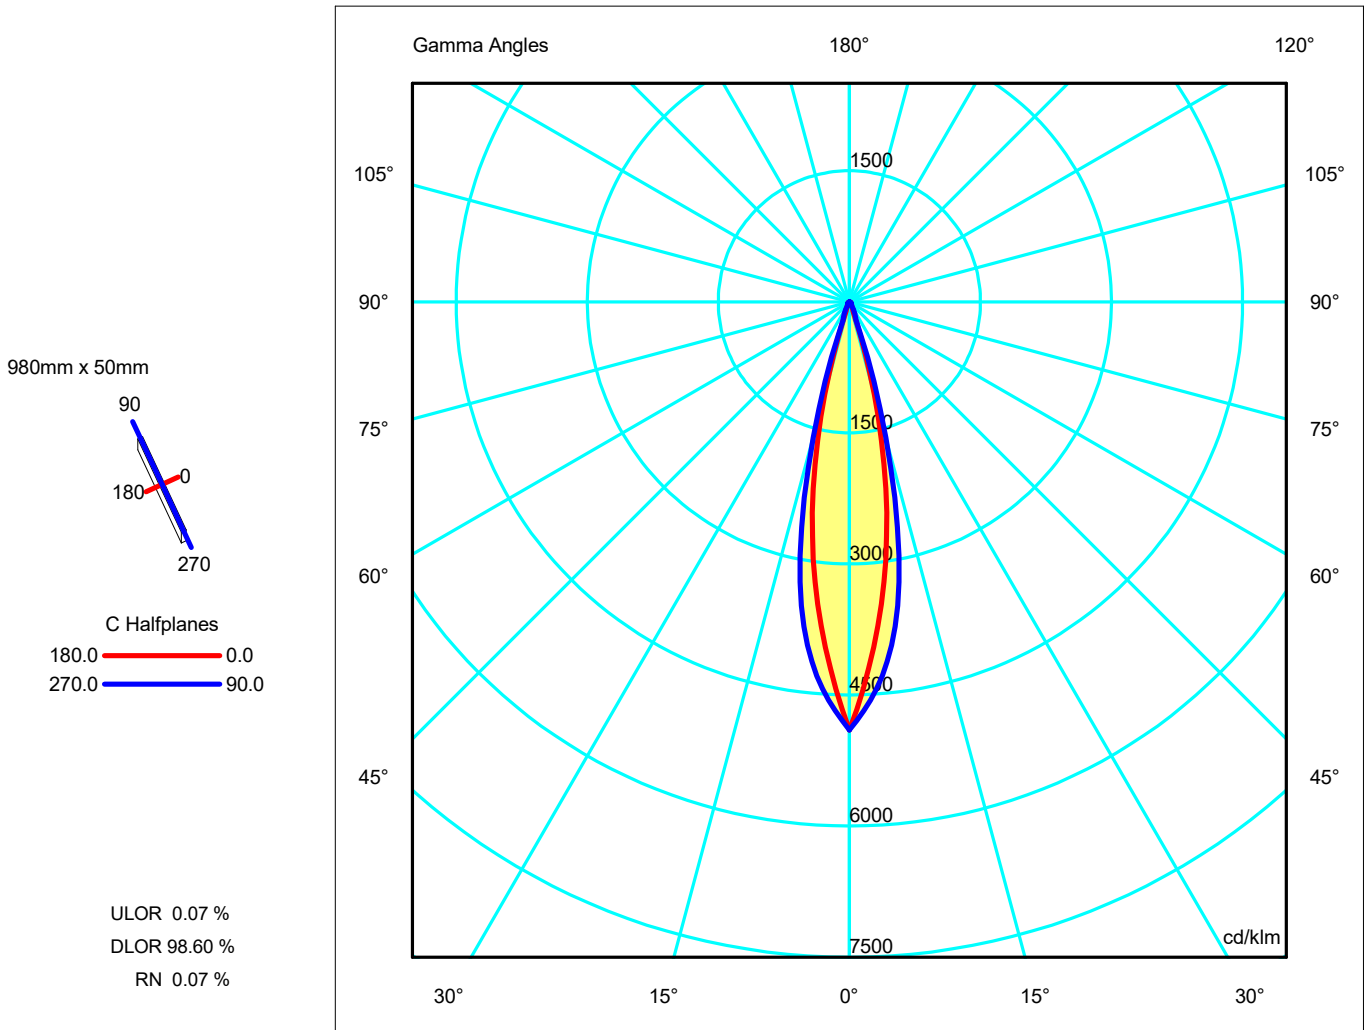


**Luminaire**  
 Code FO06NW30  
 Name XFLOW  
**Measurem.**  
 Code FO06NW30  
 Name XFLOW

Luminaire Flux	1731.67 lm	Luminaire Power	24.00 W	Efficacy	72.15 lm/W	Efficiency	98.67%
Lamps Flux	1755.00 lm	Maximum value	4898.82 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

980mm x 50mm

C Halfplanes

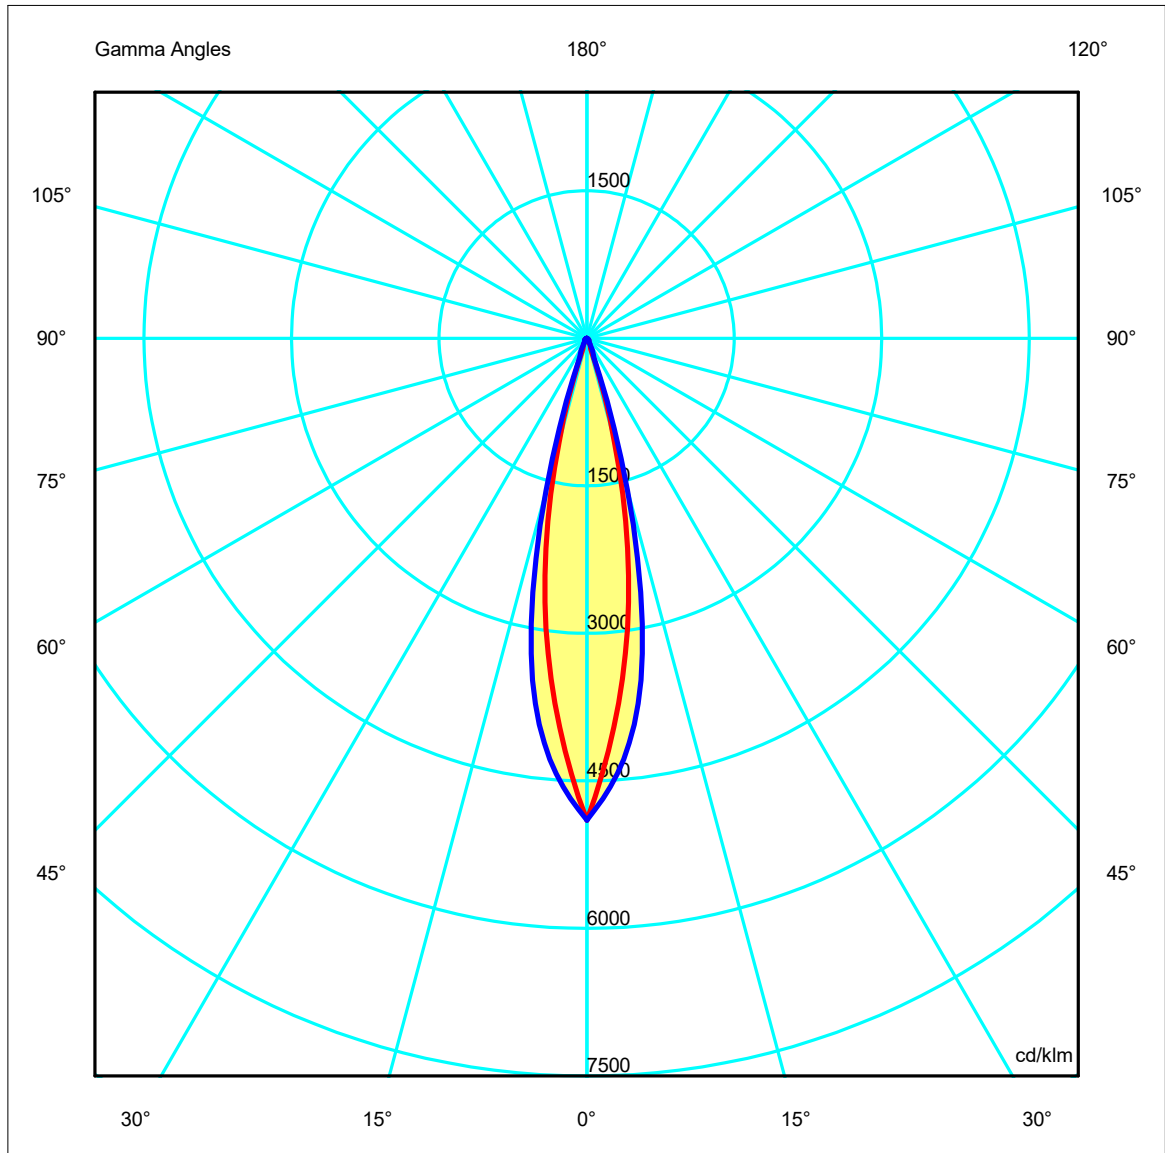

**Luminaire**

Code FO06NW30  
Name XFLOW

**Measurement**

Code FO06NW30  
Name XFLOW

Luminaire Flux	1731.67 lm	Luminaire Power	24.00 W	Efficacy	72.15 lm/W	Efficiency	98.67%
Lamps Flux	1755.00 lm	Maximum value	4898.82 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

**UGR**  
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	4.7	5.4	5.0	5.6	6.3	5.2	5.9	5.4	6.1	6.3
x=2H y=3H	5.1	5.7	5.3	5.9	6.7	5.6	6.2	5.9	6.5	6.7
x=2H y=4H	5.1	5.7	5.4	5.9	6.8	5.7	6.3	6.0	6.5	6.8
x=2H y=6H	5.1	5.6	5.4	5.9	6.8	5.7	6.2	6.0	6.5	6.8
x=2H y=8H	5.0	5.5	5.3	5.8	6.8	5.7	6.2	6.0	6.5	6.8
x=2H y=12H	5.0	5.5	5.3	5.8	6.7	5.6	6.1	6.0	6.4	6.7
x=4H y=2H	5.1	5.7	5.4	5.9	6.6	5.5	6.1	5.8	6.3	6.6
x=4H y=3H	5.5	6.0	5.8	6.3	7.1	6.0	6.4	6.3	6.8	7.1
x=4H y=4H	5.5	6.0	5.9	6.3	7.2	6.1	6.5	6.4	6.8	7.2
x=4H y=6H	5.5	5.9	5.9	6.2	7.2	6.1	6.4	6.5	6.8	7.2
x=4H y=8H	5.5	5.8	5.9	6.2	7.1	6.0	6.3	6.5	6.7	7.1
x=4H y=12H	5.4	5.7	5.9	6.1	7.1	6.0	6.3	6.4	6.7	7.1
x=8H y=4H	5.5	5.8	5.9	6.2	7.1	6.0	6.3	6.5	6.7	7.1
x=8H y=6H	5.5	5.7	5.9	6.1	7.1	6.0	6.2	6.5	6.7	7.1
x=8H y=8H	5.4	5.6	5.9	6.1	7.1	6.0	6.2	6.4	6.6	7.1
x=8H y=12H	5.4	5.5	5.9	6.0	7.1	5.9	6.1	6.4	6.6	7.1
x=12H y=4H	5.5	5.7	5.9	6.2	7.1	6.0	6.3	6.4	6.7	7.1
x=12H y=6H	5.4	5.6	5.9	6.1	7.1	6.0	6.2	6.4	6.6	7.1
x=12H y=8H	5.4	5.5	5.9	6.0	7.1	5.9	6.1	6.4	6.6	7.1