

**Luminaire**


 Code FO06WW15X60  
 Name XFLOW

**Measur.**

 Code FO06WW15X60  
 Name XFLOW

Luminaire Flux	1631.52 lm	Luminaire Power	24.00 W	Efficacy	67.98 lm/W	Efficiency	99.18%
Lamps Flux	1645.00 lm	Maximum value	2759.56 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire Rectangular Luminous Area	Length Length	980 mm 980 mm	Width Width	50 mm 50 mm	Height Height	10 mm 10 mm	
Horizontal Luminous Area Emitting area on Plane 0° Emitting area on Plane 90°	0.049000 m2 0.009800 m2 0.000500 m2		Emitting area on Plane 180° Emitting area on Plane 270° Glare area at 76°	0.009800 m2 0.000500 m2 0.021363 m2			
Coordinate system Date Measurement Distance	CG 07-05-2019 0.00		Symmetry Type Maximum Gamma Angle Measurement Flux	Double Symmetrical 180 1645.00 lm			
Operator Temperature Humidity Notes	25.00 °C 60.00 %		Source Voltage [V] Source current [A] Photocell				

Line		Code	Luminaire Lamps		Flux [lm]	Pow. [W]	Q.ty
		FO06WW15X60	Name	XFLOW	1645.00	24.00	1
C.I.E.	94 99 100 100 99		D DIN 5040	A60			
F UTE	0.99 A		B NBN	BZ 1			

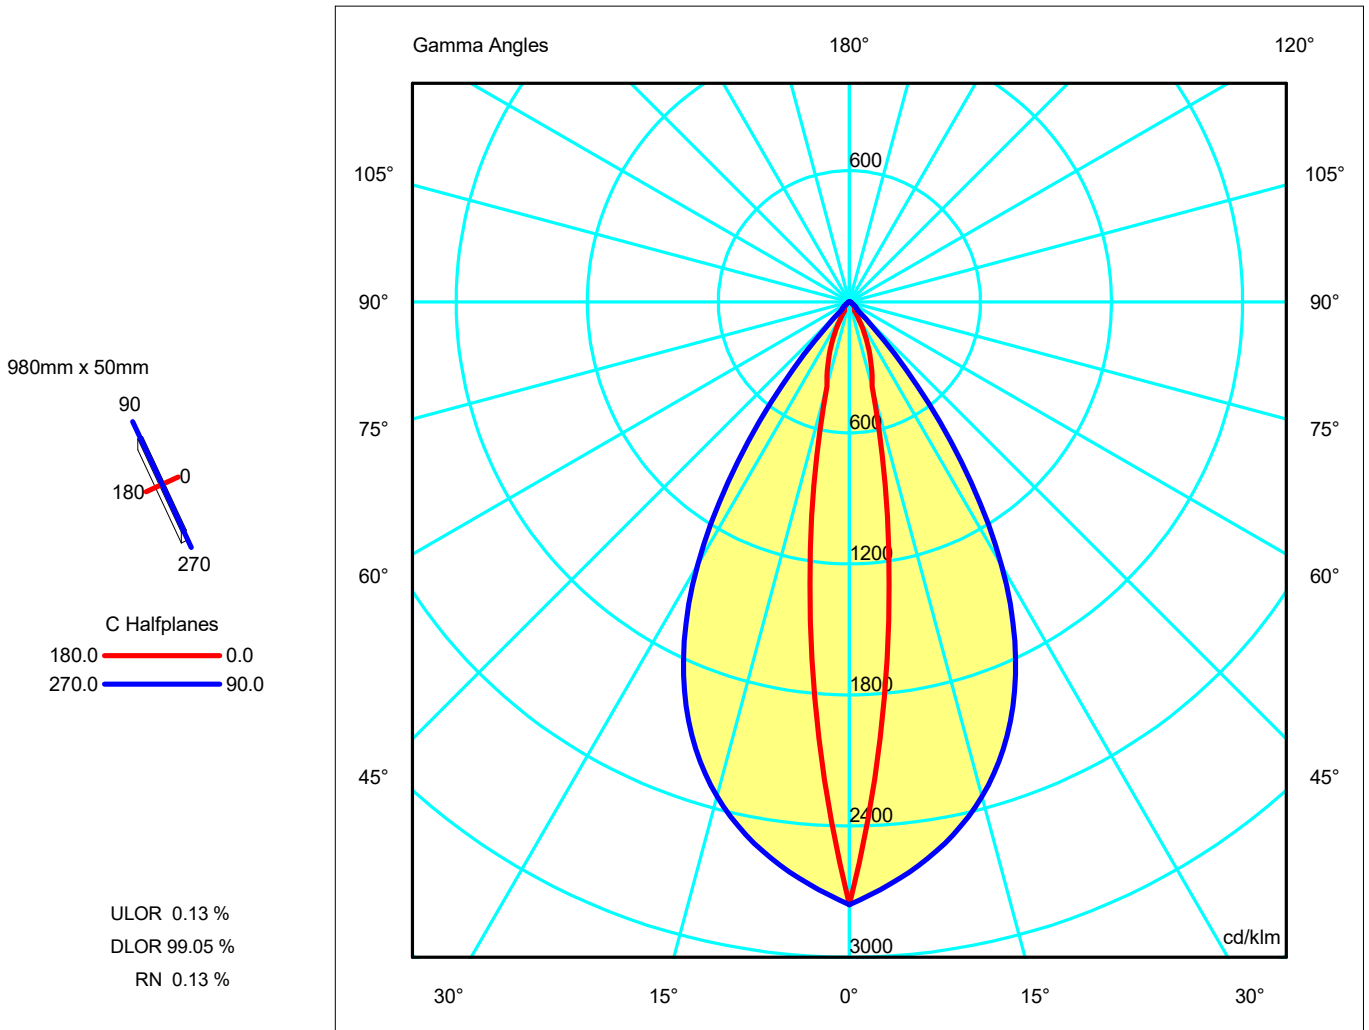


**Luminaire**  
 Code FO06WW15X60  
 Name XFLOW  
**Measurem.**  
 Code FO06WW15X60  
 Name XFLOW


Luminaire Flux	1631.52 lm	Luminaire Power	24.00 W	Efficacy	67.98 lm/W	Efficiency	99.18%
Lamps Flux	1645.00 lm	Maximum value	2759.56 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

980mm x 50mm

C Halfplanes



180.0 ————— 0.0  
 270.0 ————— 90.0

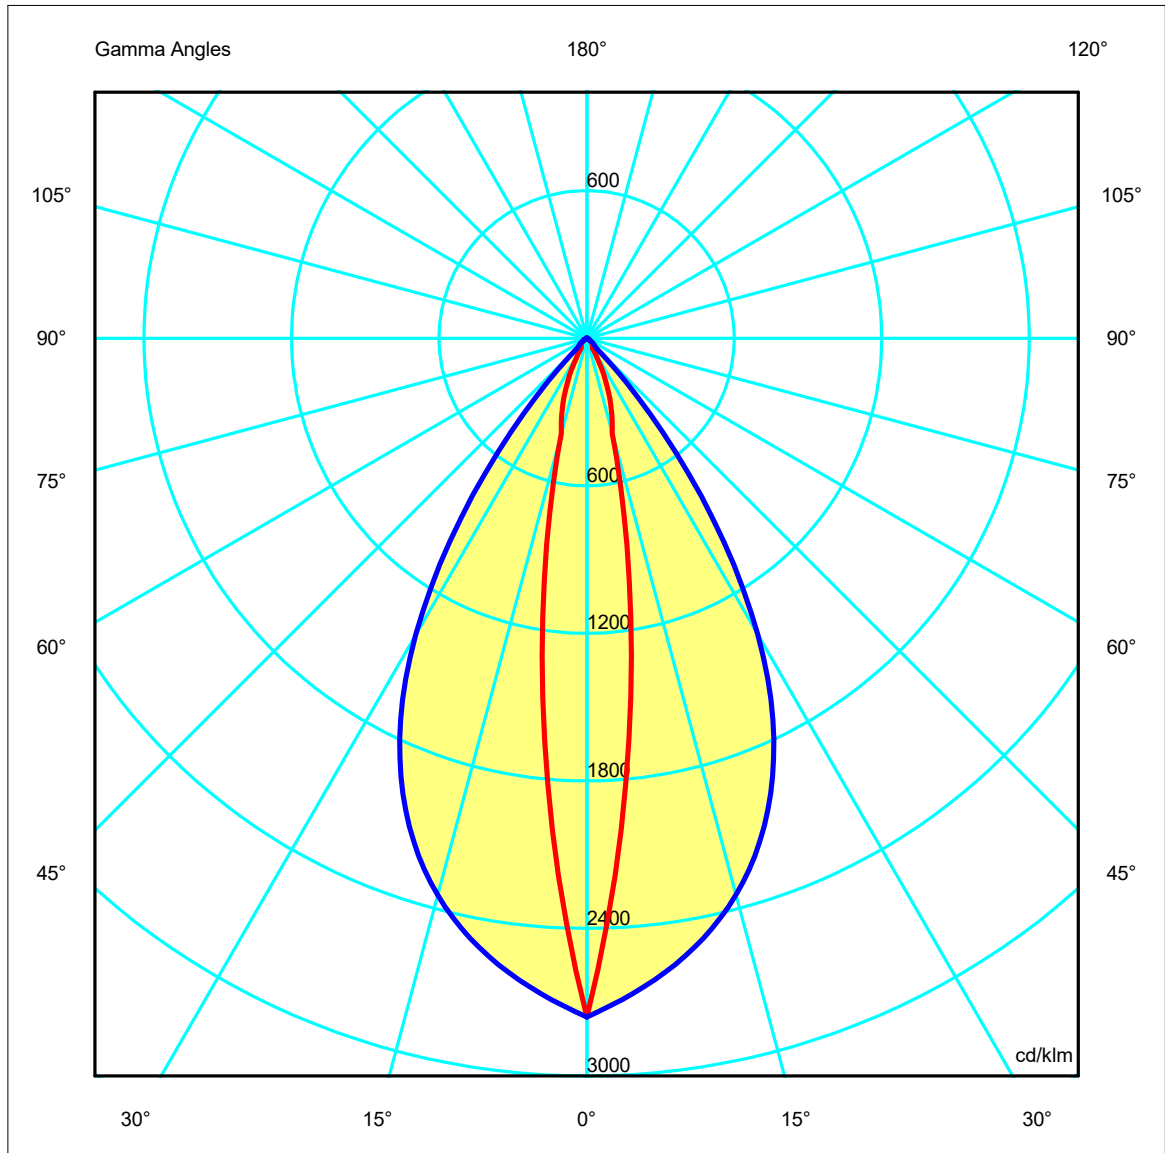

**Luminaire**

Code FO06WW15X60  
Name XFLOW

**Measurement**

Code FO06WW15X60  
Name XFLOW

Luminaire Flux	1631.52 lm	Luminaire Power	24.00 W	Efficacy	67.98 lm/W	Efficiency	99.18%
Lamps Flux	1645.00 lm	Maximum value	2759.56 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

**UGR**  
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	4.2	4.9	4.4	5.1	14.4	13.3	14.0	13.5	14.2	14.4
x=2H y=3H	4.8	5.5	5.1	5.7	14.3	13.2	13.8	13.5	14.1	14.3
x=2H y=4H	4.9	5.5	5.2	5.7	14.3	13.2	13.8	13.5	14.0	14.3
x=2H y=6H	4.8	5.4	5.1	5.7	14.2	13.1	13.6	13.4	13.9	14.2
x=2H y=8H	4.8	5.3	5.1	5.6	14.2	13.1	13.6	13.4	13.9	14.2
x=2H y=12H	4.8	5.3	5.1	5.6	14.2	13.0	13.5	13.4	13.8	14.2
x=4H y=2H	4.7	5.3	5.0	5.5	14.3	13.1	13.8	13.4	14.0	14.3
x=4H y=3H	5.4	5.9	5.7	6.2	14.2	13.0	13.5	13.4	13.8	14.2
x=4H y=4H	5.4	5.8	5.8	6.2	14.1	13.0	13.4	13.4	13.8	14.1
x=4H y=6H	5.4	5.8	5.8	6.1	14.0	12.9	13.3	13.3	13.7	14.0
x=4H y=8H	5.4	5.7	5.8	6.1	14.0	12.9	13.2	13.3	13.6	14.0
x=4H y=12H	5.4	5.7	5.8	6.1	14.0	12.9	13.1	13.3	13.5	14.0
x=8H y=4H	5.4	5.7	5.8	6.0	14.0	12.9	13.2	13.3	13.6	14.0
x=8H y=6H	5.4	5.6	5.8	6.0	13.9	12.8	13.1	13.3	13.5	13.9
x=8H y=8H	5.4	5.6	5.8	6.0	13.9	12.8	13.0	13.3	13.4	13.9
x=8H y=12H	5.4	5.5	5.8	6.0	13.9	12.7	12.9	13.2	13.4	13.9
x=12H y=4H	5.3	5.6	5.8	6.0	13.9	12.8	13.1	13.3	13.5	13.9
x=12H y=6H	5.3	5.5	5.8	6.0	13.9	12.8	13.0	13.2	13.4	13.9
x=12H y=8H	5.3	5.5	5.8	6.0	13.9	12.7	12.9	13.2	13.4	13.9