

Luminaire


 Code FO06WW30
 Name XFLOW

Measur.

 Code FO06WNW30
 Name XFLOW

Luminaire Flux	1624.12 lm	Luminaire Power	24.00 W	Efficacy	67.67 lm/W	Efficiency	98.67%
Lamps Flux	1646.00 lm	Maximum value	4898.82 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical
Rectangular Luminaire		Length	980 mm	Width	50 mm	Height	10 mm
Rectangular Luminous Area		Length	980 mm	Width	50 mm	Height	10 mm
Horizontal Luminous Area	0.049000 m2			Emitting area on Plane 180°		0.009800 m2	
Emitting area on Plane 0°	0.009800 m2			Emitting area on Plane 270°		0.000500 m2	
Emitting area on Plane 90°	0.000500 m2			Glare area at 76°		0.021363 m2	
Coordinate system	CG			Symmetry Type		Double Symmetrical	
Date	10-05-2019			Maximum Gamma Angle		180	
Measurement Distance	0.00			Measurement Flux		1646.00 lm	
Operator				Source Voltage [V]			
Temperature	25.00 °C			Source current [A]			
Humidity	60.00 %			Photocell			
Notes							

Line		Code		Luminaire Lamps		Name		Flux [lm]	Pow. [W]	Q.ty
		FO06WW30		XFLOW				1646.00	24.00	1
C.I.E.	95 99 100 100 99			D DIN 5040		A60				
F UTE	0.99 A			B NBN		BZ 1				



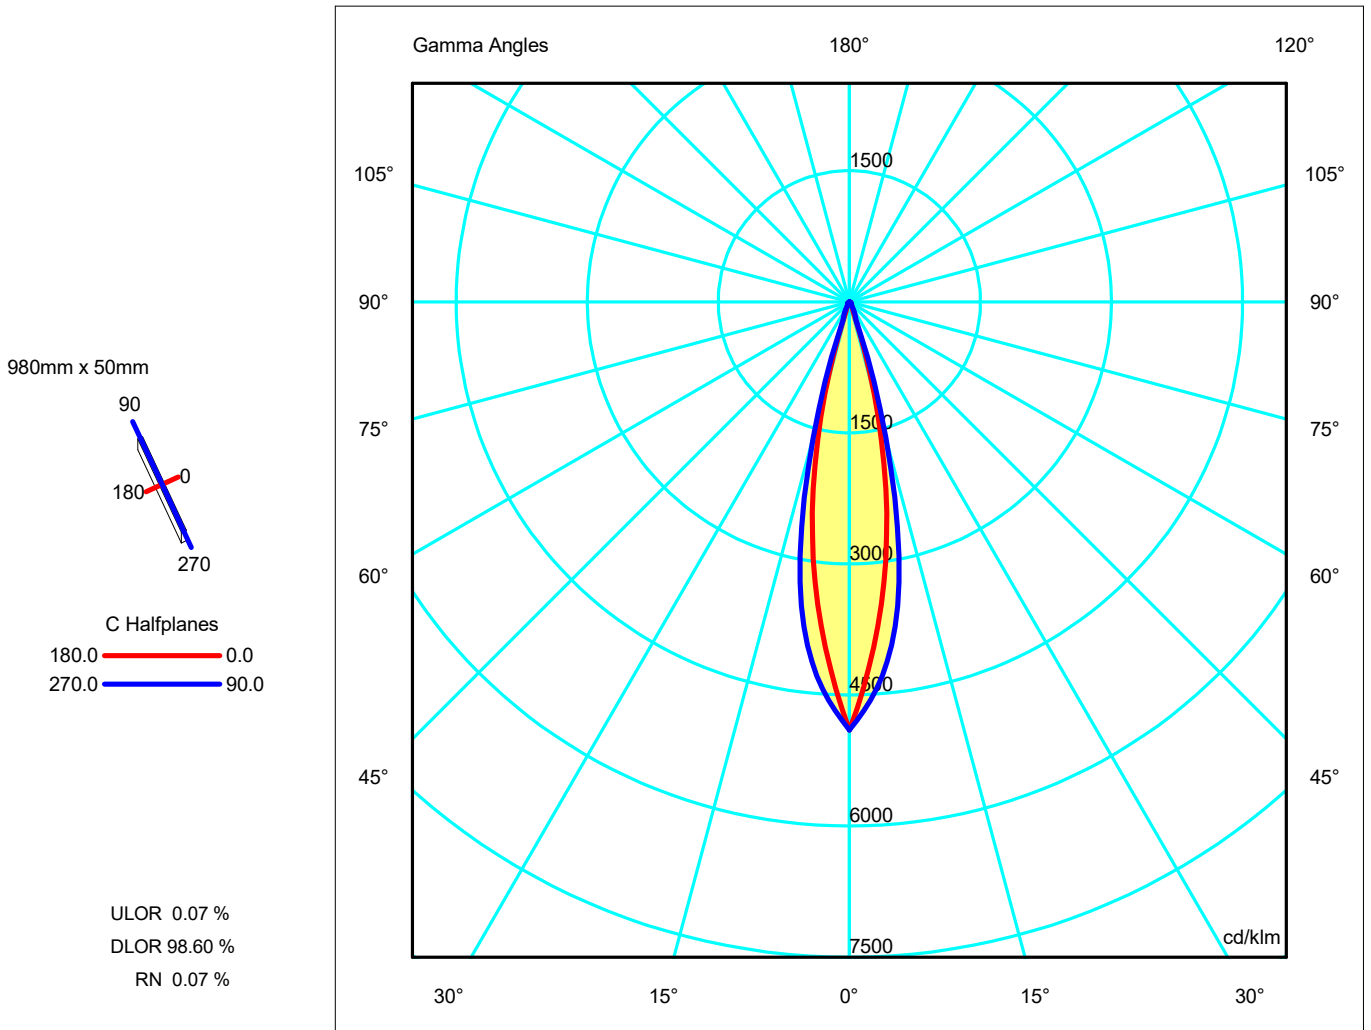


Luminaire
 Code FO06WW30
 Name XFLOW
Measurem.
 Code FO06WNW30
 Name XFLOW

Luminaire Flux	1624.12 lm	Luminaire Power	24.00 W	Efficacy	67.67 lm/W	Efficiency	98.67%
Lamps Flux	1646.00 lm	Maximum value	4898.82 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

980mm x 50mm

C Halfplanes

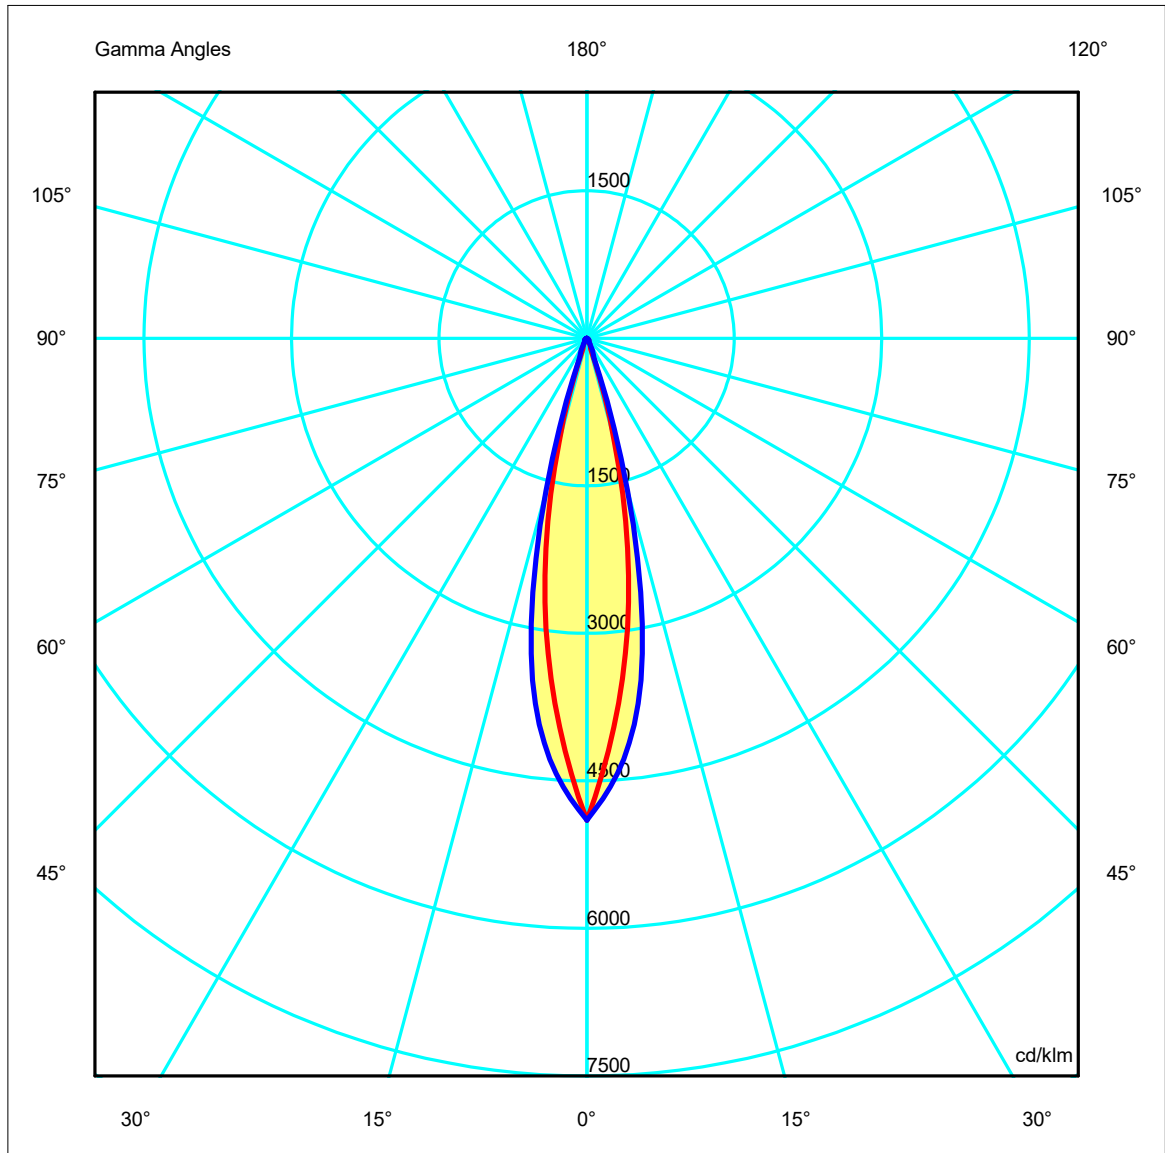

Luminaire

Code FO06WW30
Name XFLOW

Measurement

Code FO06WNNW30
Name XFLOW

Luminaire Flux	1624.12 lm	Luminaire Power	24.00 W	Efficacy	67.67 lm/W	Efficiency	98.67%
Lamps Flux	1646.00 lm	Maximum value	4898.82 cd/klm	Position	C=0.00 G=0.00	CG	Double Symmetrical

UGR
S = 0.250

Reflectancies										
Ceiling/Cavity	0.7	0.7	0.5	0.5	0.3	0.7	0.7	0.5	0.5	0.3
Walls	0.5	0.3	0.5	0.3	0.3	0.5	0.3	0.5	0.3	0.3
WorkingPlane	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
RoomDimensions	ViewedCrosswise					ViewedEndwise				
x=2H y=2H	4.5	5.2	4.7	5.4	6.1	5.0	5.7	5.2	5.9	6.1
x=2H y=3H	4.8	5.5	5.1	5.7	6.5	5.4	6.0	5.7	6.3	6.5
x=2H y=4H	4.9	5.5	5.2	5.7	6.6	5.5	6.1	5.8	6.3	6.6
x=2H y=6H	4.8	5.4	5.2	5.6	6.6	5.5	6.0	5.8	6.3	6.6
x=2H y=8H	4.8	5.3	5.1	5.6	6.5	5.4	6.0	5.8	6.2	6.5
x=2H y=12H	4.8	5.2	5.1	5.6	6.5	5.4	5.9	5.7	6.2	6.5
x=4H y=2H	4.8	5.4	5.1	5.7	6.3	5.2	5.8	5.5	6.1	6.3
x=4H y=3H	5.2	5.7	5.6	6.1	6.8	5.7	6.2	6.1	6.5	6.8
x=4H y=4H	5.3	5.7	5.7	6.1	6.9	5.8	6.3	6.2	6.6	6.9
x=4H y=6H	5.3	5.6	5.7	6.0	6.9	5.8	6.2	6.2	6.6	6.9
x=4H y=8H	5.2	5.5	5.7	5.9	6.9	5.8	6.1	6.2	6.5	6.9
x=4H y=12H	5.2	5.5	5.6	5.9	6.9	5.8	6.0	6.2	6.5	6.9
x=8H y=4H	5.3	5.6	5.7	6.0	6.9	5.8	6.1	6.2	6.5	6.9
x=8H y=6H	5.2	5.5	5.7	5.9	6.9	5.8	6.0	6.2	6.5	6.9
x=8H y=8H	5.2	5.4	5.7	5.8	6.9	5.8	6.0	6.2	6.4	6.9
x=8H y=12H	5.2	5.3	5.6	5.8	6.8	5.7	5.9	6.2	6.3	6.8
x=12H y=4H	5.3	5.5	5.7	5.9	6.9	5.8	6.0	6.2	6.4	6.9
x=12H y=6H	5.2	5.4	5.7	5.8	6.9	5.8	6.0	6.2	6.4	6.9
x=12H y=8H	5.2	5.3	5.6	5.8	6.8	5.7	5.9	6.2	6.3	6.8