


XVOSS

**3 YEARS
WARRANTY**



EN

Series of ceiling luminaires for interior, surface mounted, equipped with SMD LEDs.
Structure of die-cast aluminum, electrostatically painted.
The element for mounting of steel sheet.
The light fittings are equipped with opal polycarbonate diffusers.
Constant current LED driver included.
Block of terminals 2P+N (10A/250V/2,5mm²).

Range of applications

General interior lighting, decorative lighting.

RO

*Serie de plafoniere pentru interior, cu montaj aparent, echipate cu LED-uri SMD.
Structură din aluminiu turnat, vopsită în câmp electrostatic.
Element de montaj din tablă de oțel.
Corpurile de iluminat sunt prevăzute cu dispersoare opale din policarbonat.
Alimentator LED în curent constant inclus.
Clemă de conexiuni 2P+N (10A/250V/2,5mm²).*

Aplicații

Iluminatul general de interior, iluminatul decorativ.

IT

Serie di plafoniere per interno, montaggio da superficie, dotate di LED SMD.
Struttura in pressofusione di alluminio, verniciato a polveri.
Elemento di montaggio in lamiera di acciaio.
Gli apparecchi sono dotati di diffusori opalini in policarbonato.
Alimentatore LED in corrente costante incluso.
Morsettiere 2P+N (10A/250V/2,5mm²).




Campi di applicazione

illuminazione generale d'interni, illuminazione decorativa.

VS01

FINISHING AVAILABLE

MWH MBK

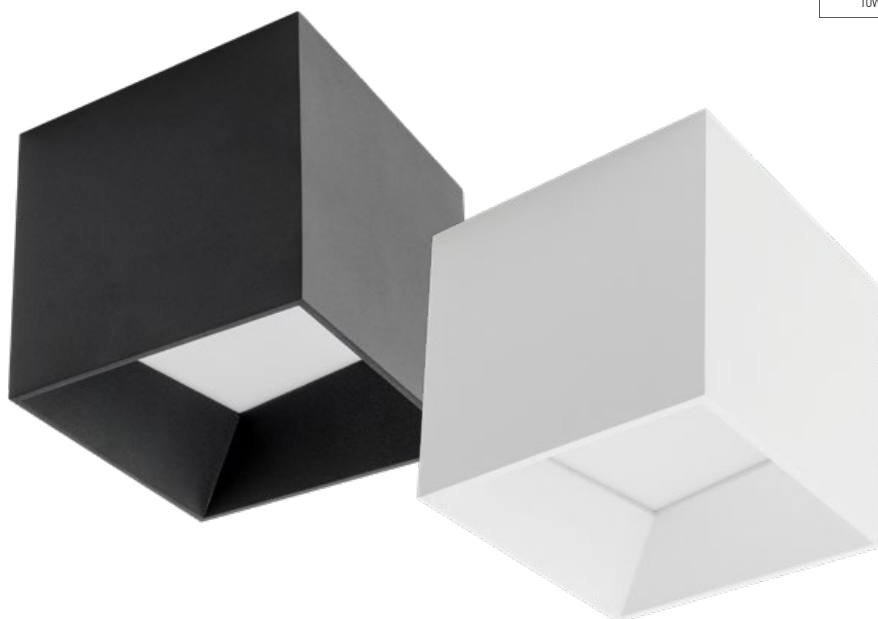

| Code | Finishing | Type of LED | Power | Input voltage | Output current/voltage driver | Driver | LED flux | System flux | CCT | CRI | Optics | Weight |
|-------------|-----------|----------------|-------|---------------|-------------------------------|----------|----------|-------------|-------|-----|--------|---------|
| VS01UWW MWH | MWH | SMD 3030 OSRAM | 10W | 220-240V AC | 700 mA / 11-22V DC | Included | 655 lm | 407 lm | 2700K | 90 | 110° | 0,70 kg |
| VS01WW MWH | MWH | SMD 3030 OSRAM | 10W | 220-240V AC | 700 mA / 11-22V DC | Included | 675 lm | 416 lm | 3000K | 90 | 110° | 0,70 kg |
| VS01UWW MBK | MBK | SMD 3030 OSRAM | 10W | 220-240V AC | 700 mA / 11-22V DC | Included | 655 lm | 407 lm | 2700K | 90 | 110° | 0,70 kg |
| VS01WW MBK | MBK | SMD 3030 OSRAM | 10W | 220-240V AC | 700 mA / 11-22V DC | Included | 675 lm | 416 lm | 3000K | 90 | 110° | 0,70 kg |

